



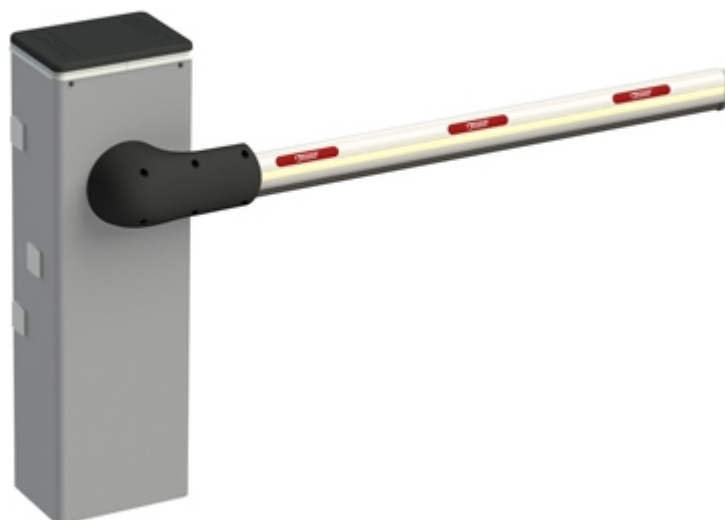

Code	Description	Pcs/pallet
BI/006	Automatic Barrier Brushless 36V DC super intensive use up to 6 meters, with operator and and built-in digital control panel and absolute encoder on board.	6


Product technical specifications	BI/006
Barriers	Up to 6 mt long
Power line supply	230V AC - 50Hz
Motor power supply	36V DC
Electrical absorption	max 15A
Power rating	220W
Frequency of use	Super intensive use
Torque	10 - 300 N m
Operating temperature	- 20 + 55 C°
Protection level	IP54
Reductor Type	Irreversible
Opening time at 90°	4 ÷ 8 (sec)
Onboard control unit	AG/CTRL Digital Controller 36V DC
Encoder	Digital native encoder + magnetic digital SENSORED, 4096 PPR
Accessories power supply	24V DC
Release system	European Key cylinder
Batteries recovery	Available (optional)
BUS synchronization Master/Slave	Yes
Operating cycles per day (opening/closing - 24 hours no stop)	4000 cycles
Maximum dimension product in mm (L x W x H)	380 x 270 x 1237
Product weight packed (Kg)	74
Number items per pallet	6

PRODUCT DIMENSIONS

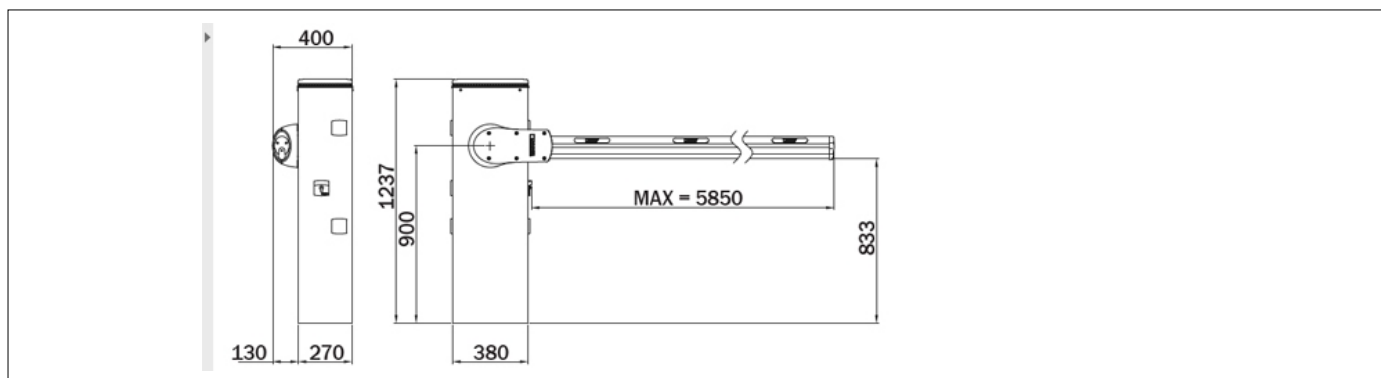


DIMENSIONS


PRODUCT ACCESSORIES




BAFS/01
Fixed support for bars.




BAFS/02
Fixing support,
adjustable.




BAFS/03
Fixing support with bolt
predisposition for bars.




BAFS/04
Fixing support
adjustable, with bolt
predisposition for bars.




BAFS/05
Adjustable fixed end rest
for barriers of the ranges
with magnetic suction
cup.




BAMS/01
Mobile support for bars.




BAMS/01/EXT
Extension 20cm for
mobile support
BAMS/01.




BA/90/2
White painted aluminum
rod, 2 meters long, with
LED cover profile and
impact resisting rubber
profile.




BA/90/3
White painted aluminum
rod, 3 meters long, with
LED cover profile and
impact resisting rubber
profile.




BA/90/4
White painted aluminum
rod, 4 meters long, with
LED cover profile and
impact resisting rubber
profile.




BA/90/6
White painted aluminum
rod, 6 meters long, with
LED cover profile and
impact resisting rubber
profile.



JNT/BA/90
Internal boom bar joint in
anodized aluminum
including fixing screws
for bars BA/90.



BARK/02
Barrier skirting in
aluminum, with stainless
steel screws mounted on
bronze bushings. Single
module of length 2
meters.




BI/BAT/KIT
Kit for emergency
batteries charger for
brushless digital
controller AG/CTRL 36V
DC with plug-in card,
with 2 recovery batteries
12V DC, 4.5 Ah. Kit for
BIONIK barrier.




BI/BCHP
Plug-in card, batteries
charger, for brushless
digital controller
AG/CTRL 36V DC,
without recovery
batteries, for BIONIK
barrier.




BT12V45
Pair of batteries 12V 4.5
Ah.



KT230
Fixing plate with stay
bolts and screws for
BI/001PE - BI/001PC -
BI/004HP - BI/006.



KT230/IS
Fixing plate, inox AISI
304 version, with stay
bolts and screws for
series Agilik - KB.



KT231
Fixing plate for code
AG/BAFS/01,
AG/BAFS/02,
AG/BAFS/03,
AG/BAFS/04,
AG/BAFS/05.



CRA/BAR
Post for photocells
G90/F2ES - G90/F4ES -
for spaced installation
on a barrier cabinet
(+23cm).



B73/EXP
Signal status board, 2
output for CTRL -
CTRL/P



SP/83/01
Spring diameter 83 mm
for barriers.



SP/85/01
Spring diameter 85 mm
for barriers.



SP/85/AS/02
Assembly 2 spring
diameter 85 mm for
barriers.

**DLD1/24**

Loop detector for 1 loop,
2 output, 24V AC/DC.

**DLD2/24**

Loop detector for 2 loop,
2 output + output alarm,
24V AC/DC.

**KT239**

Kit DIN rail with magnetic
support.

**KT242**

Cable passage kit, with
magnetic support, for
barriers.

**ALED/12C**

Luminous led cord of 12
meters with connection
cable for boom arms.

**R99/BASB40**

Pack of 40 stickers for
barrier.