





## Composition SET BH23/284

| Code              | Description                                                                                                                                                                                                                                                                    | QTY |
|-------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----|
| <b>BH23/282</b>   | Electromechanical articulated motor BRUSHLESS, low voltage, super intensive use, with native encoder onboard, irreversible ideal for swing gates with leaf up to 2.8 meters of length. With mechanical stopper in opening and closing and with standard version of short arms. | 2   |
| <b>KIT B70/20</b> | Electronic kit with digital controller 24V B70/2DC/BOX for two motors BRUSHLESS.                                                                                                                                                                                               | 1   |
|                   | <b>Composition KIT B70/20</b>                                                                                                                                                                                                                                                  |     |
|                   | <b>B70/2DC/BOX</b><br>Digital control 24V for 2 BRUSHLESS motor, with plastic box.                                                                                                                                                                                             | 1   |
|                   | <b>H93/RX22A/I</b><br>Plug-in receiver 2 channels 433,92 Mhz for control unit series H70, B70, EDGE and AG/CTRL.                                                                                                                                                               | 1   |
|                   | <b>E80/TX52R/2</b><br>Fix code transmitter 433,92 Mhz. 2 channels, with radio for copy.                                                                                                                                                                                        | 2   |
|                   | <b>R90/F4ES</b><br>Pair of external photocells synchronized 24V AC/DC (max. 4 pairs).                                                                                                                                                                                          | 1   |
|                   | <b>FIFTHY/24</b><br>LED flashing light series FIFTHY 24V with integrated antenna.                                                                                                                                                                                              | 1   |
|                   | <b>R99/C/001</b><br>Signboard "Automatic Opening"                                                                                                                                                                                                                              | 1   |

| Product technical specifications                              | SET BH23/284                              |
|---------------------------------------------------------------|-------------------------------------------|
| Power line supply                                             | 230V AC - 50Hz                            |
| Motor power supply                                            | 24V                                       |
| Power rating                                                  | 160W                                      |
| Frequency of use                                              | Intensive use                             |
| Torque                                                        | 50 - 280 N m                              |
| Operating temperature                                         | -20+55° C                                 |
| Protection level                                              | IP43                                      |
| Reductor Type                                                 | Irreversible                              |
| Manoeuvre speed                                               | 1 - 1,9 Rpm                               |
| Opening time at 90°                                           | 12-20 s                                   |
| Limit switch                                                  | Mechanical stopper in opening and closing |
| Encoder                                                       | Digital native encoder SENSORLESS 48 PPR  |
| Operating cycles per day (opening/closing - 24 hours no stop) | 1900                                      |

### ROGER TECHNOLOGY

Via S. Botticelli, 8 - 31021, Bonisiolo di Mogliano Veneto (TV) - ITALIA P.IVA 01612340263 Tel. +39 041 5937023 Fax +39 041 5973023  
info@rogertechnology.it - www.rogertechnology.it




Maximum dimension product in mm (L x W x H)

**230 x 190 x 284**

Product weight packed (Kg)


**31,1**

## PRODUCT DIMENSIONS

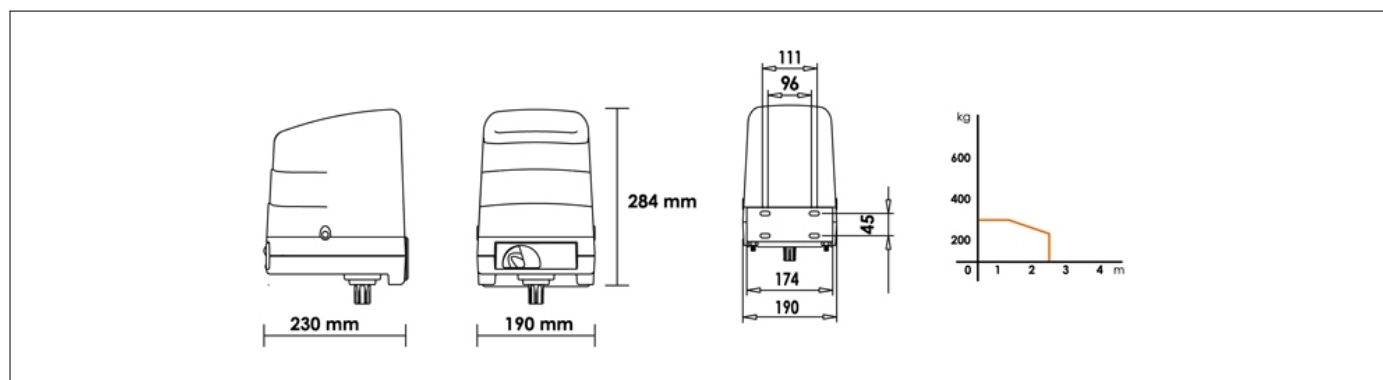

DIMENSIONS

## PRODUCT PREPARING FOR INSTALLATION

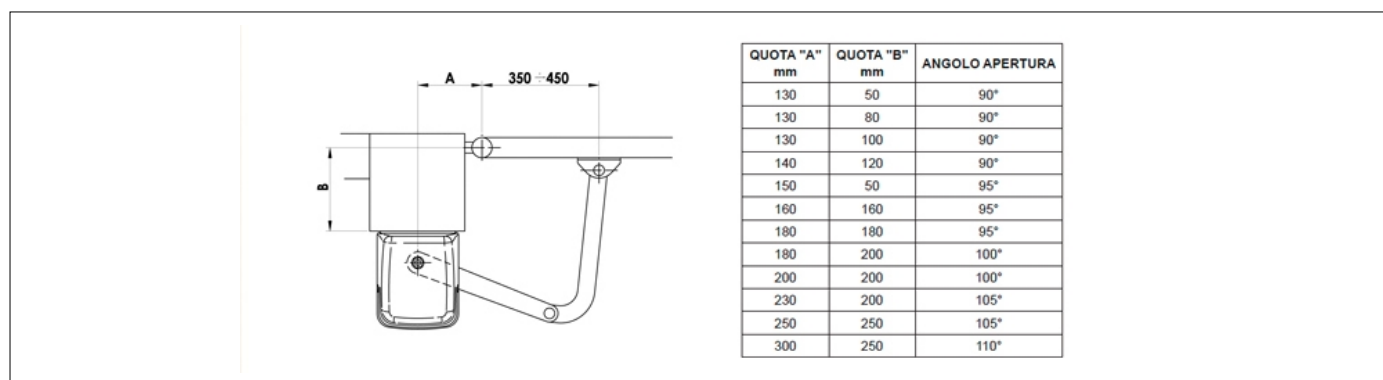

PREDISPOSIZIONE PER L'INSTALLAZIONE STANDARD

## PRODUCT ACCESSORIES

